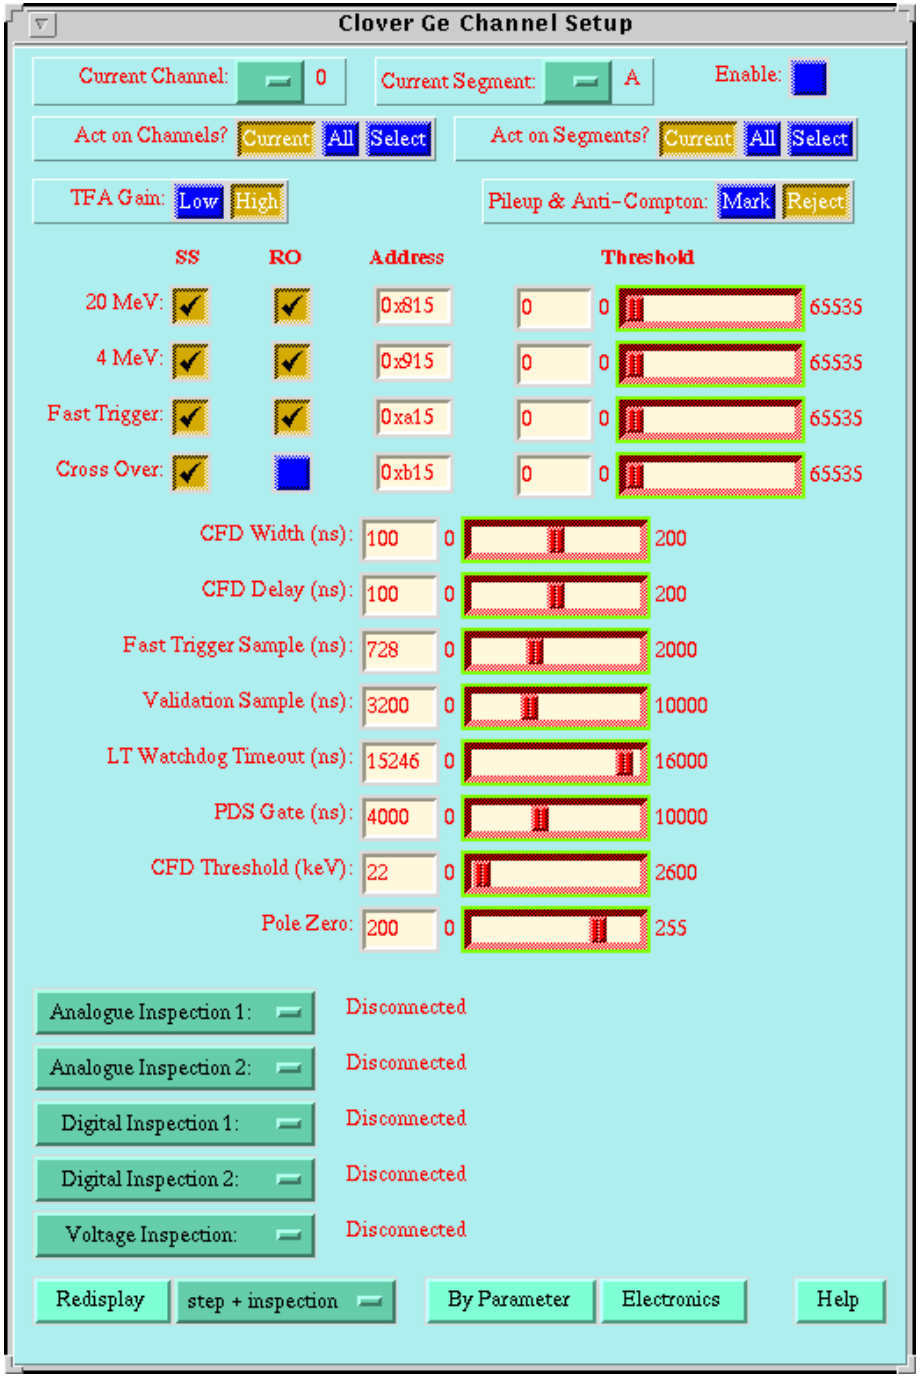
Clover Ge Channel Setup
Current Channel: 0
Current Segment: A
Enable:
Act on Channels? Current All Select
Act on Segments? Current All Select
TFA Gain: Low High
Pileup & Anti-Compton: Mark Reject
SS
RO
Address
Threshold
20 MeV: 0x815 0 0 65535
4 MeV: 0x915 0 0 65535
Fast Trigger: 0xa15 0 0 65535
Cross Over: 0xb15 0 0 65535
CFD Width (ns): 100 0 200
CFD Delay (ns): 100 0 200
Fast Trigger Sample (ns): 728 0 2000
Validation Sample (ns): 3200 0 10000
LT Watchdog Timeout (ns): 15246 0 16000
PDS Gate (ns): 4000 0 10000
CFD Threshold (keV): 22 0 2600
Pole Zero: 200 0 255
Analogue Inspection 1: Disconnected
Analogue Inspection 2: Disconnected
Digital Inspection 1: Disconnected
Digital Inspection 2: Disconnected
Voltage Inspection: Disconnected
Redisplay
step + inspection
By Parameter
Electronics
Help